




LICHTPLAN LINDENZAAL

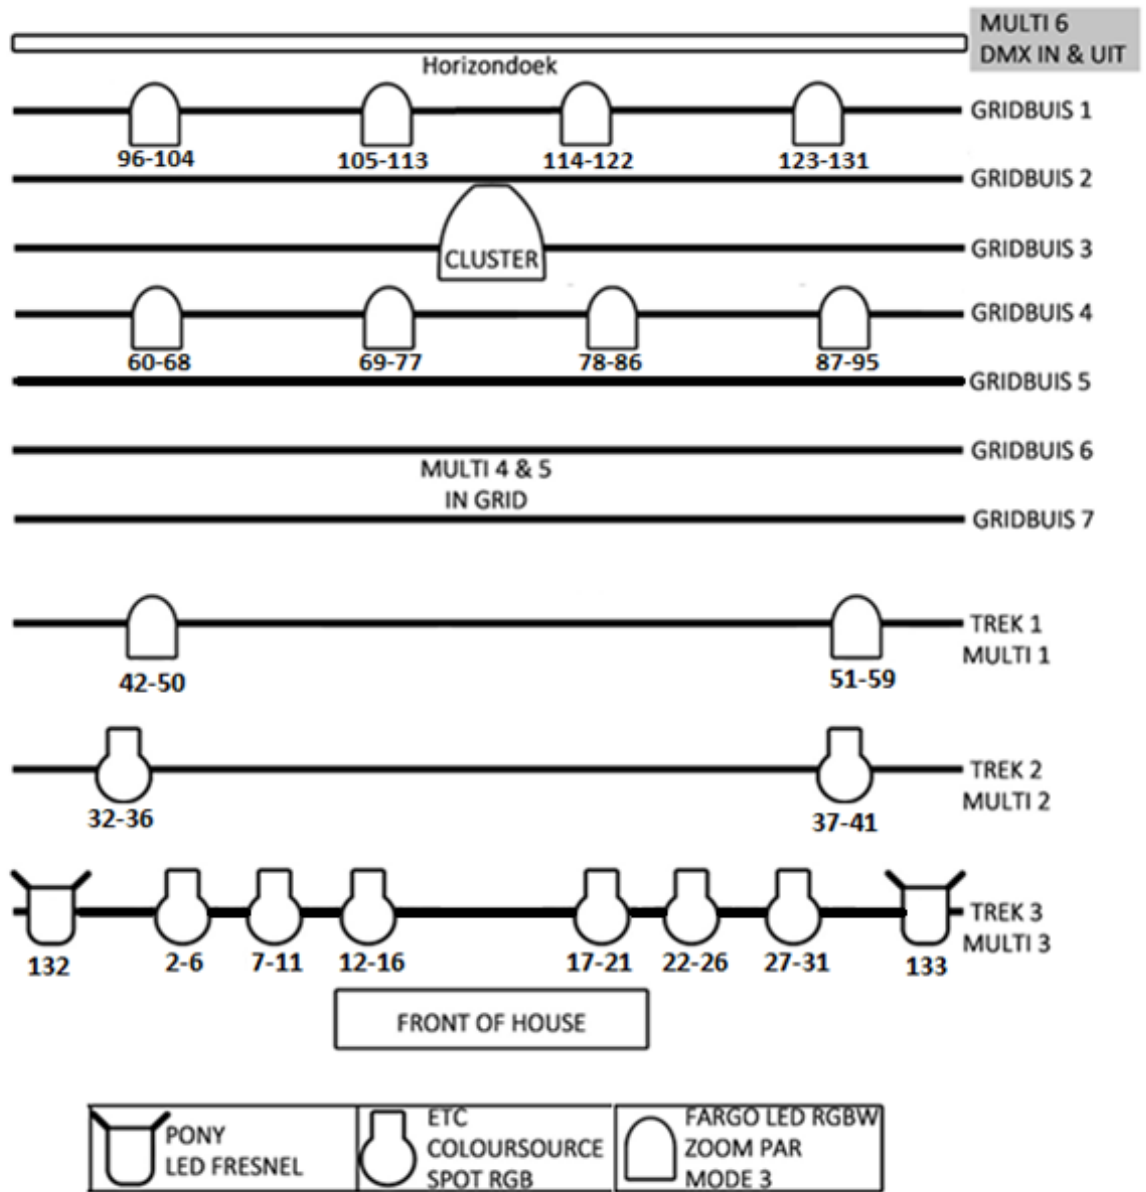

Zaallicht = channel 1
Tragleuning = 200 - 203 RGBW

12 Patchbare dimmerkringen (Ch. 140 t/m 151)
Maximaal 7 per harting. 8 is mogelijk, vaste
spanning tbv. LED verlichting vervalt.



LICHTPLAN LINDENZAAL

FARGO STAGEPAR 19 PRO ZOOM								
RED	GREEN	BLUE	WHITE	DIMMER	DIMMER FINE	STROBE	COLOR	ZOOM
42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59
60	61	62	63	64	65	66	67	68
69	70	71	72	73	74	75	76	77
78	79	80	81	82	83	84	85	86
87	88	89	90	91	92	93	94	95
96	97	98	99	100	101	102	103	104
105	106	107	108	109	110	111	112	113
114	115	116	117	118	119	120	121	122
123	124	125	126	127	128	129	130	131

ETC COLOURSOURCE SPOT				
DIMMER	RED	GREEN	BLUE	STROBE
2	3	4	5	6
7	8	9	10	11
12	13	14	15	16
17	18	19	20	21
22	23	24	25	26
27	28	29	30	31
32	33	34	35	36
37	38	39	40	41

PONY
DIMMER
132
133

ZAALLICHT
DIMMER
1

TRAPLEUNING			
RED/DIM	GREEN/DIM	BLUE/DIM	WHITE/DIM
200	201	202	203

12 PATCHBARE DIMMERKRINGEN
DIMMER
140 t/m 151

LAATSTE UPDATE:
10-02-2023